

Cidori

STRUCTURAL FEATURES

PRODUCT DATA SHEET

EXTERNAL PERIMETER (fronts, sides and back panel) in *wood particle board panels thickness 20 mm with 45°-shaped vertical edges and coated with synthetic melamine matt, glossy lacquered or metal or with painted wood veneer. For the version with perimeter in glossy finish, THE TOP, THE PLINTH AND THE INTERNAL SIDE OF PERIMETER ARE ALWAYS IN MATT FINISH.

TOP thickness 20 mm and PLINTH thickness 20 or 50 mm (with foot sunk in the thickness and adjustable from the inside) in *wood particle board panels with synthetic melamine matt lacquered or metal or coated with wood veneer.

TURN DRAWER thickness 12 mm and BOTTOM thickness 8 mm in *wood particle board panels with melamine Sketch Roccia.

Tempered glass top thickness 4 mm lacquered on glossy, etched or mirror base.



*Wood and derivatives components according to the following standards: E1-TSCA-CARB-UBA.

RUNNERS FOR DRAWERS

Opening with grip or minimal profile: High sliding full extraction metal runners with FULL EXTRACTION, end-of-run buffer with dynamic capacity of 30 kg. "Blumotion" soft-closing mechanism integrated in the runner for a silence and soft closing system. Anti-tilting pin, vertical and inclination adjustment of fronts incorporated in all system runners. Additional stabilizer bar for drawers width 900 and "MOVENTO" runners with built-in stabilizer and also front side adjustment for drawers width 1200 and 1500 and 1800.

DRAWER UNITS ARE PROVIDED UPON REQUEST WITH AN ADJUSTABLE DEPTH, NON-TILTING BRACKET TO ATTACH TO THE WALL.

Storage units are characterized by a 45°-joint bevelled between side panels and fronts and, in double-sided version, also between back panel and fronts. The external perimeter, raised from the upper top, creates a tray effect where it is possible to insert a glass top or a mirror. All storage units are finished on the back and can be positioned in the centre of the room.

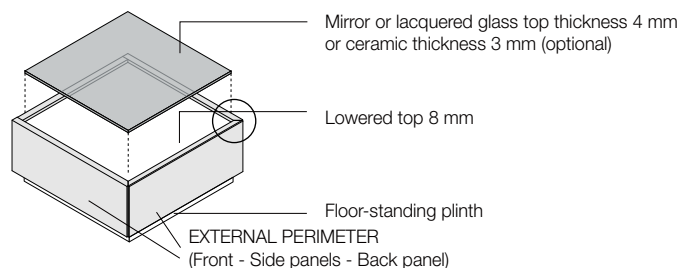

	D	W	Code	Glass/Mirror thickness 4 mm	Ceramic thickness 3 mm
TOP THICKNESS 3/4 MM The minimum width measurement for tops is 150 mm.	410	408	NTC204BV/C	Satin and glossy lacquered glass Dark mirror	<ul style="list-style-type: none"> - Ossido Bruno - Bush-hammered Antracite Pietra di Savoia - matt Noir Desir - matt Nero greco - matt Fusion white
	496	408	NTC404BV/C		
	410	558	NTC206BV/C		
	496	558	NTC406BV/C		
	410	708	NTC207BV/C		
	496	708	NTC407BV/C		
	410	858	NTC209BV/C		
	496	858	NTC409BV/C		
	410	1158	NTC212BV/C		
	496	1158	NTC412BV/C		
	410	1458	NTC215BV/C		
	496	1458	NTC415BV/C		
	410	1758	NTC218BV/C		
	496	1758	NTC418BV/C		
	410	2358	NTC224BV/C		
	496	2358	NTC424BV/C		

3/4: 450/537




MADE-TO-MEASURE: surcharge of on the price of the next larger top.

Cidori modular

STRUCTURAL FEATURES


Cidori base unit

FLOOR-STANDING




Floor-standing with protruding plinth 30 mm with built-in levelling feet.

SUPERIMPOSED





Superimposed with dividing protruding plinth 30 mm with non-slip rubbers.

PARTIAL SUPERIMPOSED




With flush bottom and partial dividing plinth thickness 30 mm with non-slip rubber.

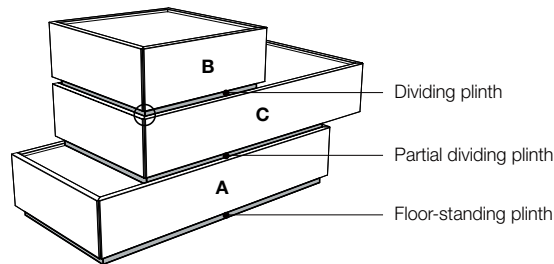

Cidori hanging


Wall units are provided with wall fixing brackets. Can be superimposed with a totally or partially separating plinth but fixed individually to the wall.

FLOOR-STANDING




Single wall unit with flush bottom

SUPERIMPOSED




Superimposed with dividing protruding plinth 30 mm with non-slip rubbers.


PARTIAL SUPERIMPOSED



With flush bottom and partial dividing plinth thickness 30 mm with non-slip rubber.

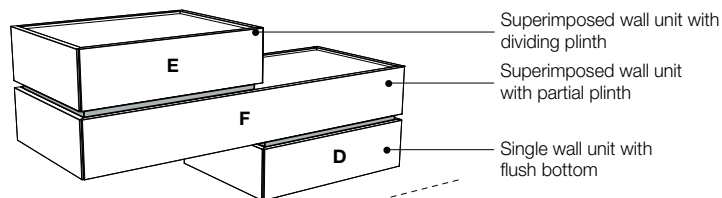

FASTENING ELEMENT FOR WALL MOUNTING WITH AN INNOVATIVE ANTI-DETACHMENT SYSTEM

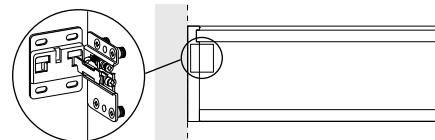

Wall unit section

19 mm

CATAS CERTIFICATE according to the rules: TÜV - LGA

22 mm

80 kg

Capacity till 80 kg each bracket


THE LOAD IS RELATED TO THE WALL FIXING HARDWARE APPLIED TO THE FURNITURE. THE DOWELS FOR THE WALL MOUNTING MAY NOT BE APPROPRIATE IN SOME SITUATIONS. THE RESPONSIBILITY OF THE FURNITURE ASSEMBLY BELONGS TO THE BUYER WHO MUST EVALUATE THE RESISTANCE OF THE WALL. THE STABILITY AND LOAD OF THE WALL-MOUNTED UNITS IS GUARANTEE BY THE PROPER ASSEMBLY AND BY FOLLOWING OUR INSTRUCTIONS CORRECTLY.

Cidori modular

STRUCTURAL FEATURES

STANDARD DOUBLE-SIDED MODULAR UNITS 45°

Standard Cidori units have finished back panels and can be stacked also facing the opposite side to opening.

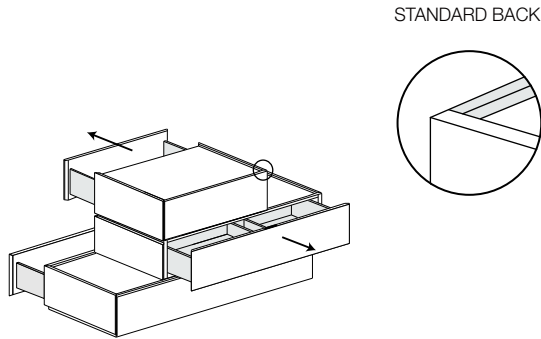


STANDARD BACK

DOUBLE-SIDED MODULAR UNITS 45°

Double-sided Cidori units have back panel jointed to the side with 45° adjustment as the fronts.

450 wide by 450 deep units and 537 wide by 537 deep units can be superimposed on units with the same depths, and the drawer opening can be positioned as wished.

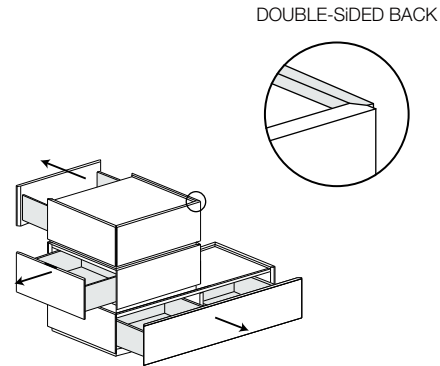


DOUBLE-SIDED BACK


MODULAR UNIT COMPARTMENTS WITH 1 DRAWER FOR STACKING FLUSH, NON-ALIGNED OR PARTIALLY ALIGNED.

* Single W 450 or W 600 units can be superimposed on W 900 units.


** For compositions with partial overlapped units.



Front and turn drawer




Front with 2 turn drawers

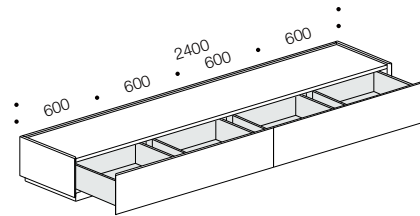


2 fronts with 4 turn drawers

MODULAR UNIT STRUCTURES FLUSH SUPERIMPOSED OR ALIGNED (UPON REQUEST)

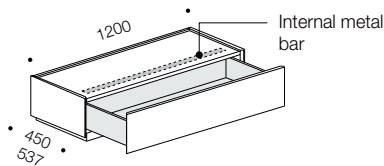

UNITS W 1200 WITH FULL TURN DRAWER
Can be superimposed on units with the same width.
Max top capacity 10 kg.



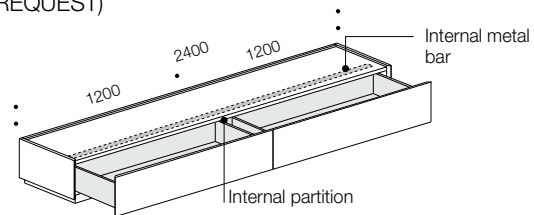


2 fronts with 2 turn drawers can be superimposed on units with the same width 2400 or units B 1200 aligned to the side and internal partition. Max capacity of RH top 10 kg and LH top 10 kg.

Base units with complete 1200 surrounds will be dispatched on demand only and after checking the feasibility of the composition at the same price.

COMPARTMENTS FOR MONO UNITS WITH 2-3-5 DRAWERS

* Cover max capacity 10 kg



Cidori modular

STRUCTURAL FEATURES


PARTIAL PLINTH TH 30 FOR UNITS WITH PROJECTION

The protrusion must always be alternated (RH-LH) and when it exceeds 150 mm for units W 450-537-600 or 300 mm for the other, the unit must be hung.



30mm thick partial plinths can be used to overlap Cidori units, also partially.

	D	W	Code
PARTIAL PLINTH TH 30	410/497	110	CZP4011
		260	CZP4026
		347	CZP4035
		410	CZP4041
		560	CZP4056
		710	CZP4071
		860	CZP4086
		1010	CZP4101
		1160	CZP4116

Finishes	
Melamine finish	Veneered oak
- Loto	- Carbone - Grigio - Avana - Argilla - Cuba
- Natura-Tortora-Terra	- Nodato Caramello - Nodato Naturale
- Sketch	- Termotrattato
- Sabbia-Roccia-Tabacco	Canaletto Walnut
- Olmo	Matt lacquered
- Medio-Scuro	Metal lacquered
- Econoce	



Surcharge for customized cut in width

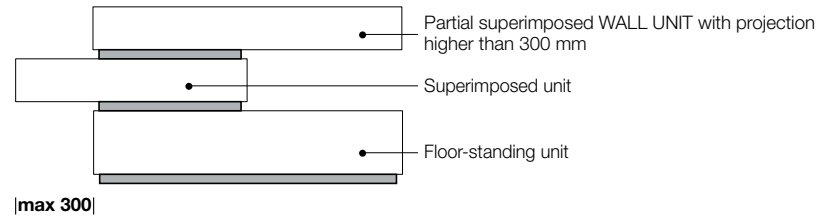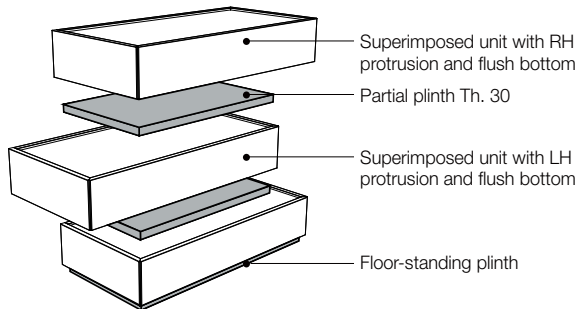

OPENING SYSTEMS

THREE WAYS TO OPEN CONTAINERS: PULL OUT THE PROTRUDING EDGE OF DRAWERS, USE THE MINIMAL PROFILE INSERTED IN THE GRIP, OR USE THE CIDORI HANDLE PROTRUDING FROM THE DRAWER.



MINIMAL PROFILE
(included in element's price)



CIDORI HANDLE
(Upon request)

MATCHING MINIMAL PROFILE/CIDORI HANDLE

DRAWERS:	MINIMAL PROFILE/CIDORI HANDLE:
Carbone OAK	BROWN
Argilla OAK	Matt CRETA
Grigio OAK	Matt ANTRACITE
Avana OAK	Matt DUNE
Cuba OAK	BROWN
CANALETTO WALNUT	BROWN
Matt LACQUERED	Matt LACQUERED
Glossy LACQUERED	Glossy LACQUERED
Metal LACQUERED	Metal LACQUERED

IMPORTANT: in the order always indicate if the units are overlapped

