

Storage units **Vela**

Structural technical features

MODULARITY


heights

(excluding feet)

Feet H 15
base support h 80/120

depths

width

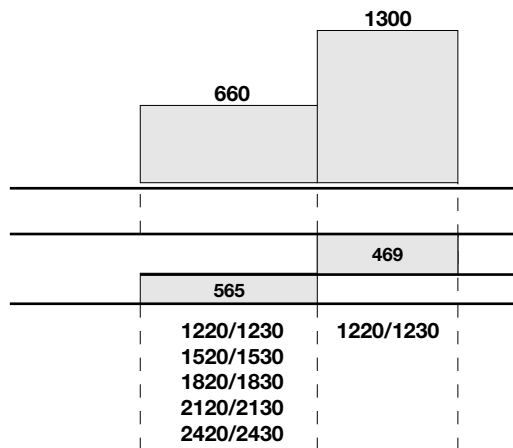

PRODUCT DATA SHEET

STRUCTURE FOR ELEMENTS in *wood particle board panels thickness 20 mm coated with synthetic melamine also matt lacquered or metal or with lacquered wood veneer. Internal shelves in transparent tempered glass thickness 6 mm.

FRONTS in medium density wood particle board panels* thickness 25 mm with handle built-in the thickness and coated with synthetic melamine matt, glossy lacquered or metal or painted wood veneer. For glossy version the internal side of fronts is always in matt finish.

BACK PANELS in medium density *wood particle board panels thickness 4 mm with synthetic melamine also matt lacquered or metal.

TURN DRAWER thickness 14 mm and BOTTOM thickness 8 mm in *wood particle board panels with melamine Sketch Roccia.

FRAME in medium density *wood particle board panels thickness 10 mm and in wood particle board panels* thickness 15 mm coated with synthetic melamine matt, glossy lacquered or metal or painted wood veneer. Black ABS FEET, diam. 50 mm and height 15 mm adjustable from the inside.

SOSPENDO BASE SUPPORT consisting of black metal frame with shaped laser-cut steel feet finished with epoxy or liquid painting or in methacrylate with transparent finish.



*Wood and derivatives components according to the following standards: E1-TSCA-CARB-UBA.

RUNNERS FOR DRAWERS



Opening with grip: High sliding full extraction metal runners with FULL EXTRACTION, end-of-run buffer with dynamic capacity of 30 kg. "Blumotion" soft-closing mechanism integrated in the runner for a silence and soft closing system. Anti-tilting pin, vertical and inclination adjustment of fronts incorporated in all system runners. Additional stabilizer bar for drawers width 900.

BASE/WALL UNITS WITH HINGED DOOR W 600/1200



SINGLE LH DOOR unit





SINGLE RH DOOR UNIT





Unit with 4 DOORS
with internal partition

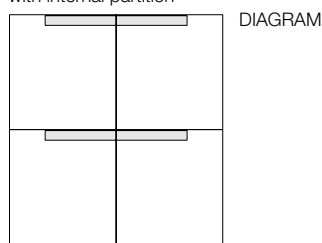

DOUBLE DOOR unit with
internal partition

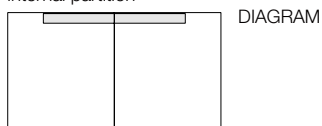

External perimeter 10 mm thick with 45° joint and 2x2 mm corner bead

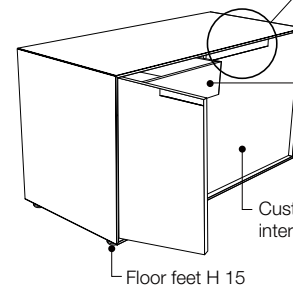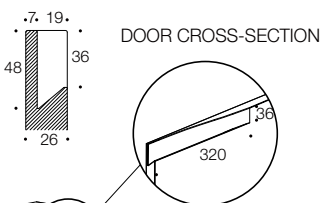

Optional internal drawer for unit with hinged door, see p. 28




Customisable internal structure

Floor feet H 15

Storage units **Vela**

Structural technical features




BASE/WALL UNITS WITH DRAWER AND DEEP DRAWER W 600/900

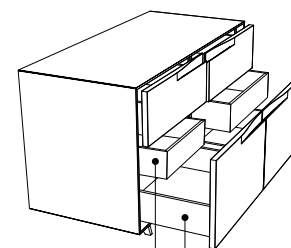

Internal drawer H 90 thickness 14 mm as standard on sideboard with deep drawer H 400

Sides H 140 thicknesses 14 mm


BASE/WALL UNITS WITH DRAWER AND DROP-DOWN DOOR W 600/900

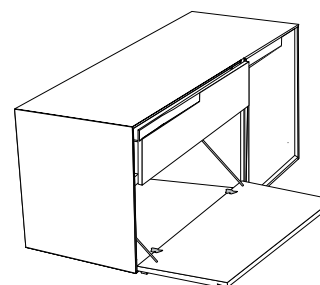

Drop-down door with NON-FLUSH hinge

OPTIONAL INTERNAL DRAWERS FOR SIDEBOARDS WITH UNITS WITH HINGED DOOR W 600 mm (see page 28)

FLOOR-STANDING SIDEBOARDS (foot H 15 mm)

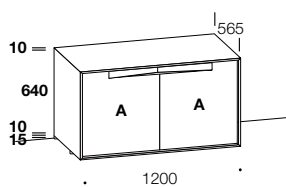

SIDEBOARD WITH SOSPENDO BASE SUPPORT (SEE PAGE 236)

Sideboards are delivered with metal antiflex base support and feet.

Vela sideboard

